



Step 1

- Position the valve in the upper half of the tyre.

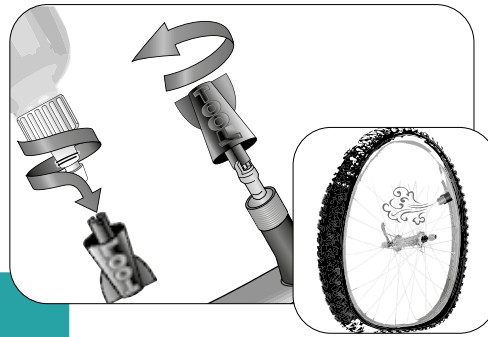

Step 2

- Take the cap off the Slime bottle.
- Use the inside of the bottle cap as a tool, to remove the valve core.
- Be careful not to lose the valve core!
- Allow the tyre to deflate completely.

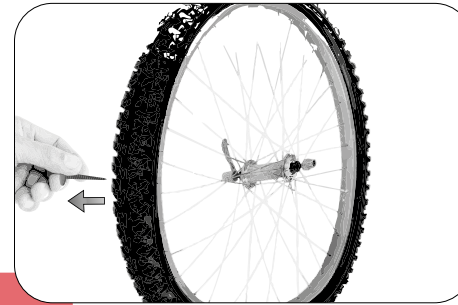

Step 3

- Remove (if needed) the object that punctured the tyre.




Step 4

- Remove the nozzle and peel off the safety seal.
- Attach one side of the hose to the nozzle of the bottle, and the other end to the valve.
- Squeeze the bottle to apply Slime. (the sealant contained in the bottle must be distributed between all the stroller's tyres)



Step 5

- After introducing the sealant, disconnect the hose and clean the valve opening.
- Place the valve core back and screw it in with the bottle cap.
- Inflate the tyre.

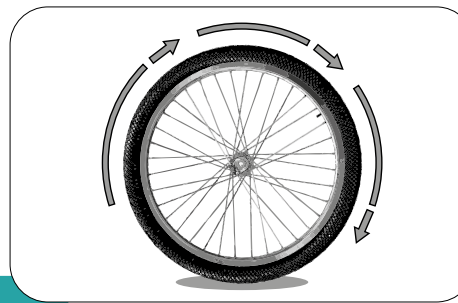

Step 6

- Spin tyre several times to allow the sealant to coat the entire tyre tread

Caution

- May cause an allergic reaction. Please read precautions on the label of the bottle.
- Slime sealants are designed to treat tread area punctures only and should not be used to repair sidewall punctures, snake bites, rim spoke punctures or gashes from metal or glass.
- One bottle of Slime should be enough to fill three 12 inch pneumatic tyres or two 18 inch pneumatic tyres.
- Slime can only seal punctures smaller than 3mm.
- InnoPet cannot replace the hose or cap that come with the Slime bottle, if they get lost.
- InnoPet does not refund or replace the product when the puncture returns after using the sealant.

InnoPet

Slime Tube Sealant

Instruction manual



Contact customer service:
+31 (0) 85 079 60 12
support@innopet.nl
<https://innopet.nl/en/contact>



For more manuals,
please visit innopet.nl